


# Cisco/Linksys Gateway and ATA's

SPA 2102, 3102, 8000, 112, 122 and PAP2

## Admin Guide

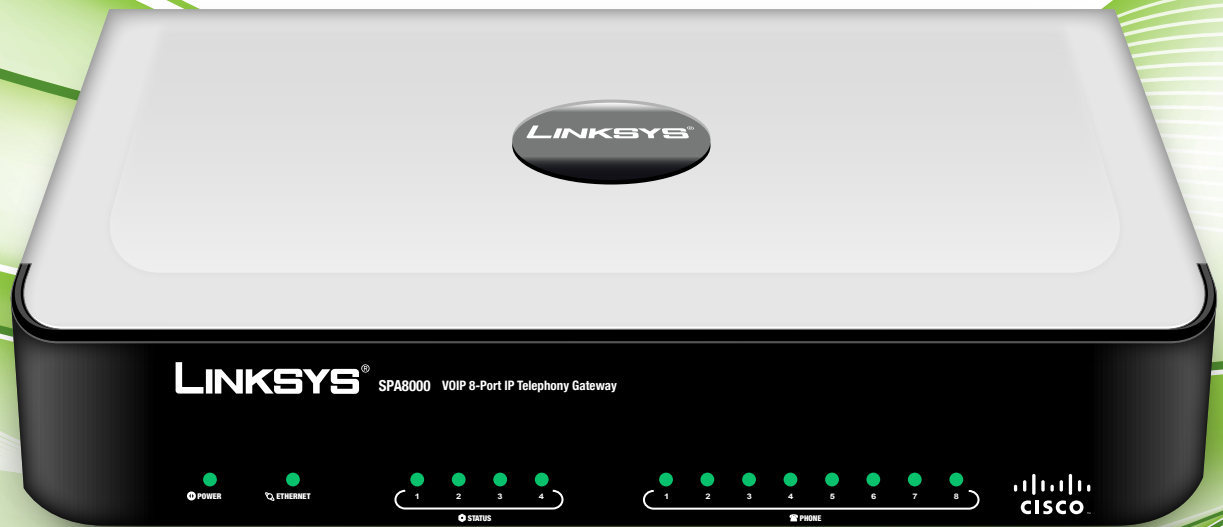

**Schmooze®**

Schmooze Com Inc.



## How To Find IP Address

### Quick Steps

1. Lift the handset of the phone connected to your ATA, Dial \*\*\*\* to initiate the IVR Menu
2. Wait to be instructed to enter your command.
3. Dial 110# and the IP address will be played to you.

## How To Find MAC Address

### Quick Steps

1. Lift the handset of the phone connected to your ATA, Dial \*\*\*\* to initiate the IVR Menu
2. Wait to be instructed to enter your command.
3. Dial 140# and the MAC address will be played to you.

## How To Set the Configuration Server

### Quick Steps

1. Find the IP Address of the device and open a web browser to the IP address of the device.
2. Login with the device user password.

The server 10.4.0.168:80 requires a username and password. The server says: spa admin.

User Name:

Password:

3. Click on the Admin option at the top and login with the admin user

**LINKSYS**<sup>®</sup>  
A Division of Cisco Systems, Inc.

Linksys Telephone Configuration

[Info](#) | [System](#) | [Phone](#) | [User](#) | [User Login](#) | [Admin](#) | [advanced](#)  
[Personal Directory](#) | [Call History](#)

System Information



4. Click on the Advanced option at the top

**LINKSYS**<sup>®</sup>  
A Division of Cisco Systems, Inc.

Linksys Telephone Configuration

Info | System | SIP | Regional | Phone | Ext 1 | Ext 2 | Ext 3 | Ext 4 | User | [User Login](#) | [basic](#) | **[advanced](#)** | [Personal Directory](#) | [Call History](#)

System Information

5. Click on Provisioning tab at the top

**LINKSYS**<sup>®</sup>  
A Division of Cisco Systems, Inc.

Linksys Telephone Configuration

Info | System | SIP | **Provisioning** | Regional | Phone | Ext 1 | Ext 2 | Ext 3 | Ext 4 | User | [User Login](#) | [basic](#) | [advanced](#) | [Personal Directory](#) | [Call History](#)

Configuration Profile

Provision Enable:	<input type="text" value="yes"/>	Resync On Reset:	<input type="text" value="yes"/>
Resync Random Delay:	<input type="text" value="2"/>	Resync Periodic:	<input type="text" value="86400"/>
Resync Error Retry Delay:	<input type="text" value="3600"/>	Forced Resync Delay:	<input type="text" value="14400"/>
Resync from SIP:	<input type="text" value="yes"/>	Resync After Upgrade Attempt:	<input type="text" value="yes"/>
Resync Trigger 1:	<input type="text"/>		
Resync Trigger 2:	<input type="text"/>		
Resync Fails On FNF:	<input type="text"/>		
Profile Rule:	<input type="text" value="tftp://10.10.0.1.spa\$MA.xml"/>		

6. Define the Profile Rule to your PBX. Generally this would be tftp://IPADDRESS/spa\$MA.xml such as tftp://10.10.0.1/spa\$MA.xml in our example and press the Save button at the bottom.

## How To Factory Default

### Quick Steps

1. Lift the handset of the phone connected to your ATA, Dial \*\*\*\* to initiate the IVR Menu
2. Wait to be instructed to enter your command.
3. Dial 73738 and Press 1 to confirm when prompted.



**Schmooze<sup>®</sup>**  
*Schmooze Com Inc.*

**(920) 886-8130**

<http://schmoozecom.com>