

Grandstream GXV-3651FHD

Admin Guide



Schmooze[®]
Schmooze Com Inc.




How to Find the MAC Address

Quick Steps

1. Once the device is detected using the GSurf_Pro software, double click the device. Your browser will automatically open and link to the device IP and the web configuration page.

Index	Model	Version	Device Name	IP	HTTP Port	RTSP Port	MAC
1	IPCAMERA 3651HD	1.0.4.43	GXV3651HD	10.10.0.1	80	554	00:0B:82:41:68:4E

2. From the home page, click on “Configuration” at the bottom left. The default username is “admin” and the default password is “admin”.

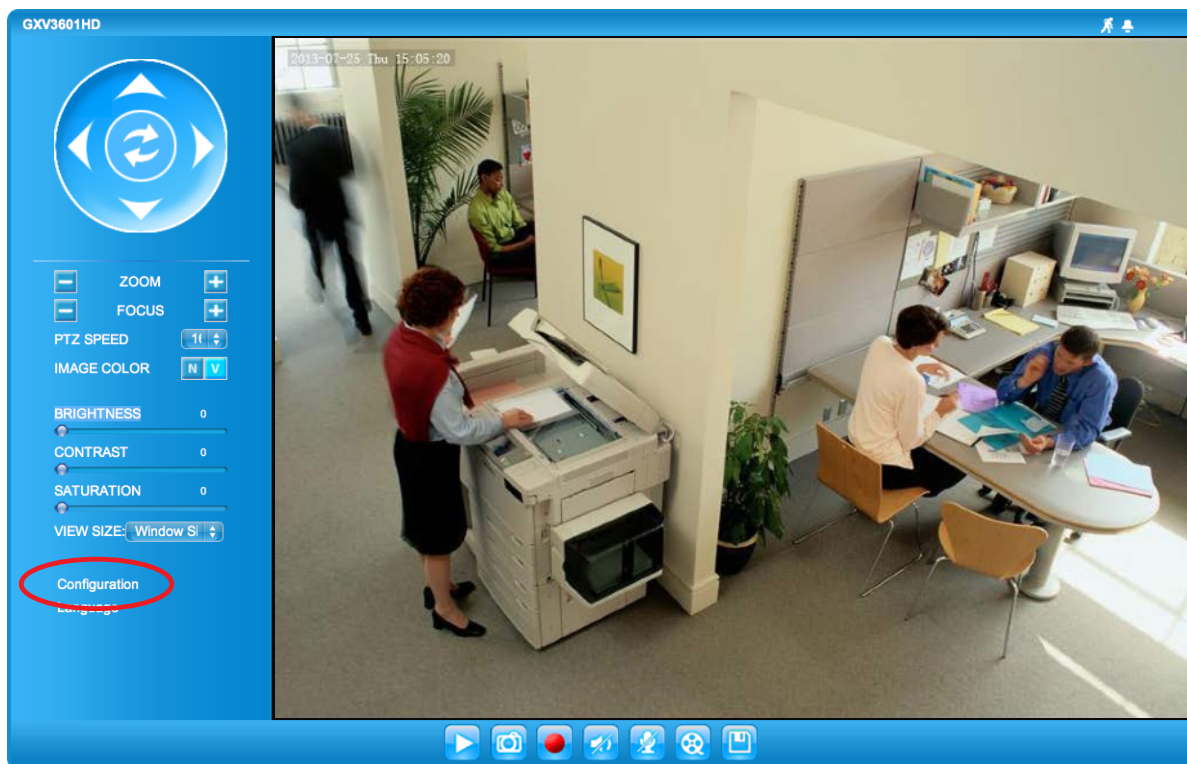


The server <http://10.10.0.1> requires a username and password.

User Name:


Password:



3. Under Basic Settings on the left, click “Status”.

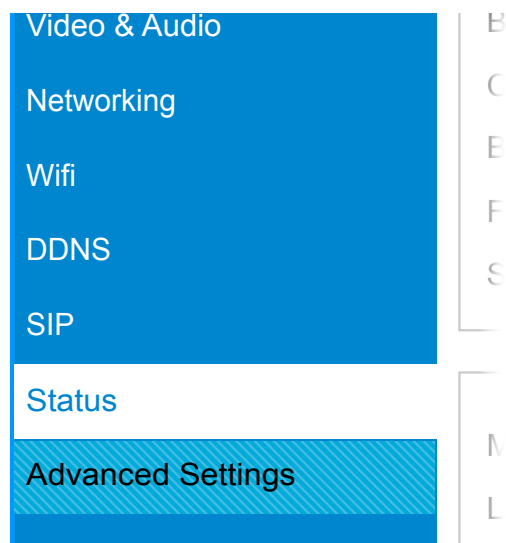

4. The MAC Address will display under Network Status.

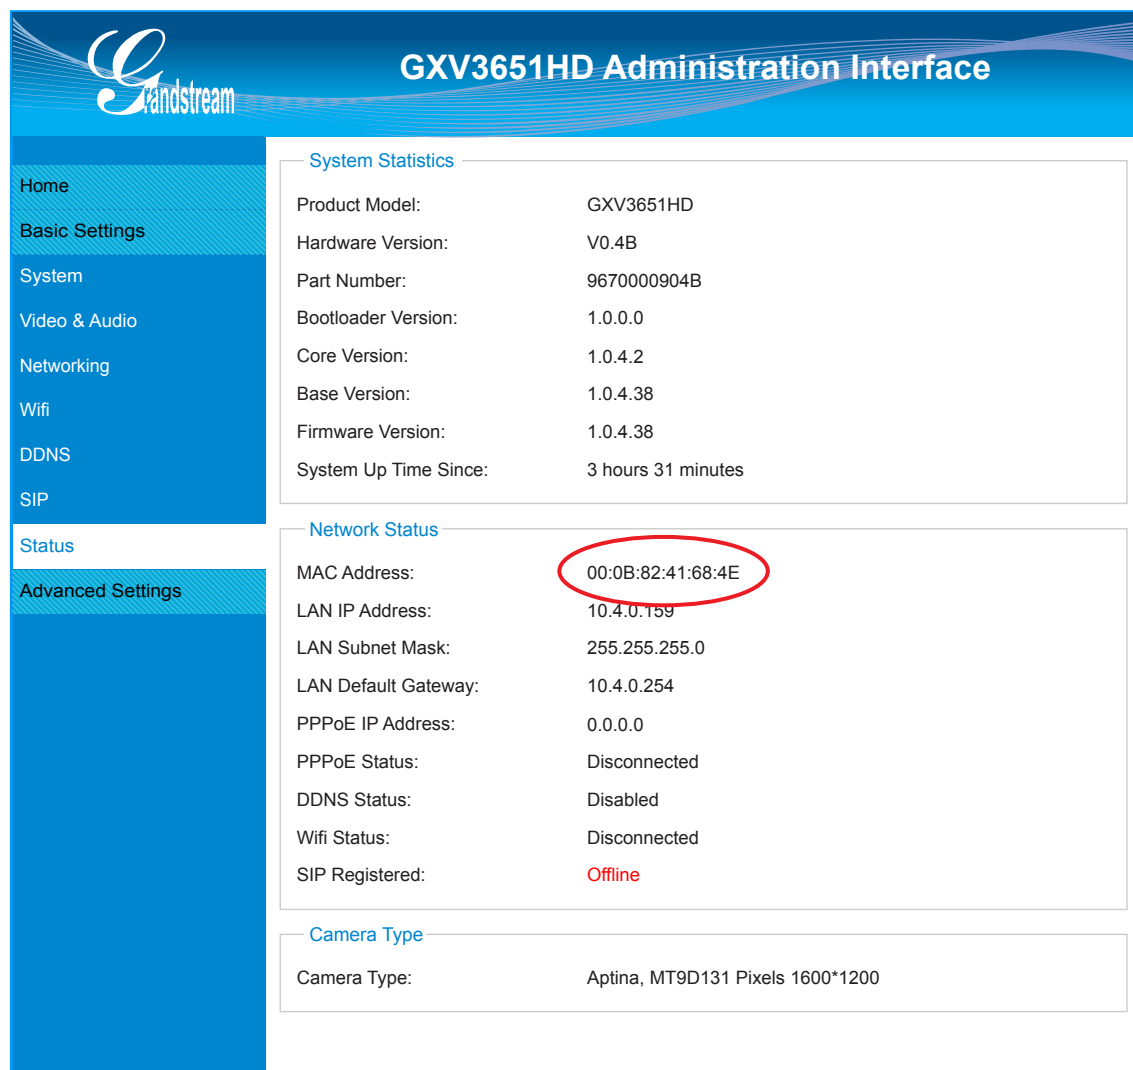




How to Set the Configuration Server

Quick Steps

1. Once the device is detected using the GSurf_Pro software, double click the device. Your browser will automatically open and link to the device IP and the web configuration page.

Index	Model	Version	Device Name	IP	HTTP Port	RTSP Port	MAC
1	IPCAMERA 3651HD	1.0.4.43	GXV3651HD	10.10.0.1	80	554	00:0B:82:41:68:4E

2. From the home page, click on “Configuration” at the bottom left. The default username is “admin” and the default password is “admin”.

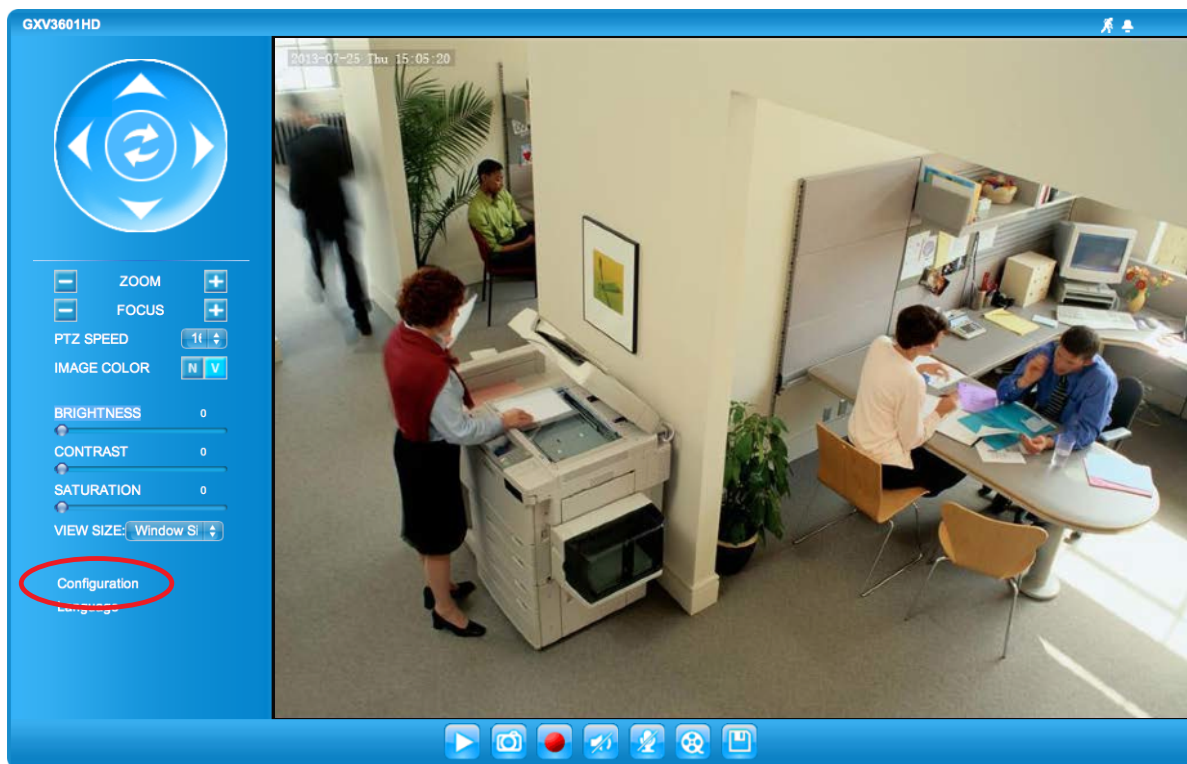


The server <http://10.10.0.1> requires a username and password.

User Name:

Password:



3. Under Advanced Settings on the left, click “Maintenance”.

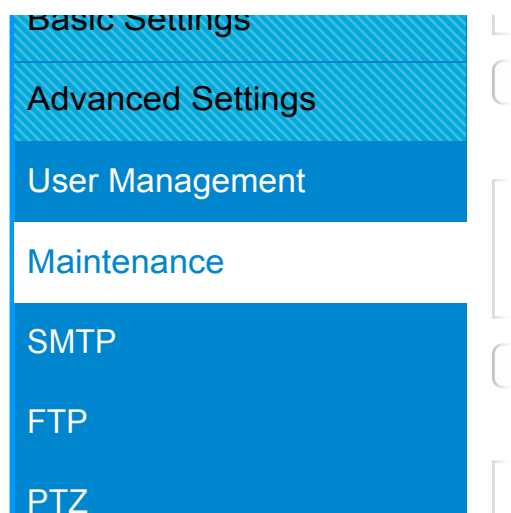

4. Then under Firmware Upgrade and Provisioning, define the Config server path to your PBX. Generally this would be the IP address such as 10.10.0.1, used in our example. Press the “Save” button at the bottom.

The screenshot shows the 'GXV3651HD Administration Interface' with a sidebar on the left containing the following menu items: Home, Basic Settings, Advanced Settings, User Management, Maintenance (highlighted), SMTP, FTP, PTZ, Alarm Server, Alarm Event, Motion Detection, Syslog, Record, and Live Storage. The main content area has three sections: 'Restart the device' with a 'Restart' button, 'Restore the device' with a 'Restore' button, and 'Firmware Upgrade and Provisioning'. In the 'Firmware Upgrade and Provisioning' section, the 'Upgrade via:' dropdown is set to 'TFTP'. The 'Firmware Server Path' is '10.10.0.1/grandstream/2'. The 'Config Server Path' is '10.10.0.1', which is circled in red. The 'XML Config File Password' is masked with dots. The 'Automatic Upgrade Interval(Minutes)' is '1080'. The 'Automatic Upgrade' checkbox is checked. A 'Save' button is at the bottom of the section.




How to Restore Factory Default

Quick Steps

1. Once the device is detected using the GSurf_Pro software, double click the device. Your browser will automatically open and link to the device IP and the web configuration page.

Index	Model	Version	Device Name	IP	HTTP Port	RTSP Port	MAC
1	IPCAMERA 3651HD	1.0.4.43	GXV3651HD	10.10.0.1	80	554	00:0B:82:41:68:4E

2. From the home page, click on “Configuration” at the bottom left. The default username is “admin” and the default password is “admin”.

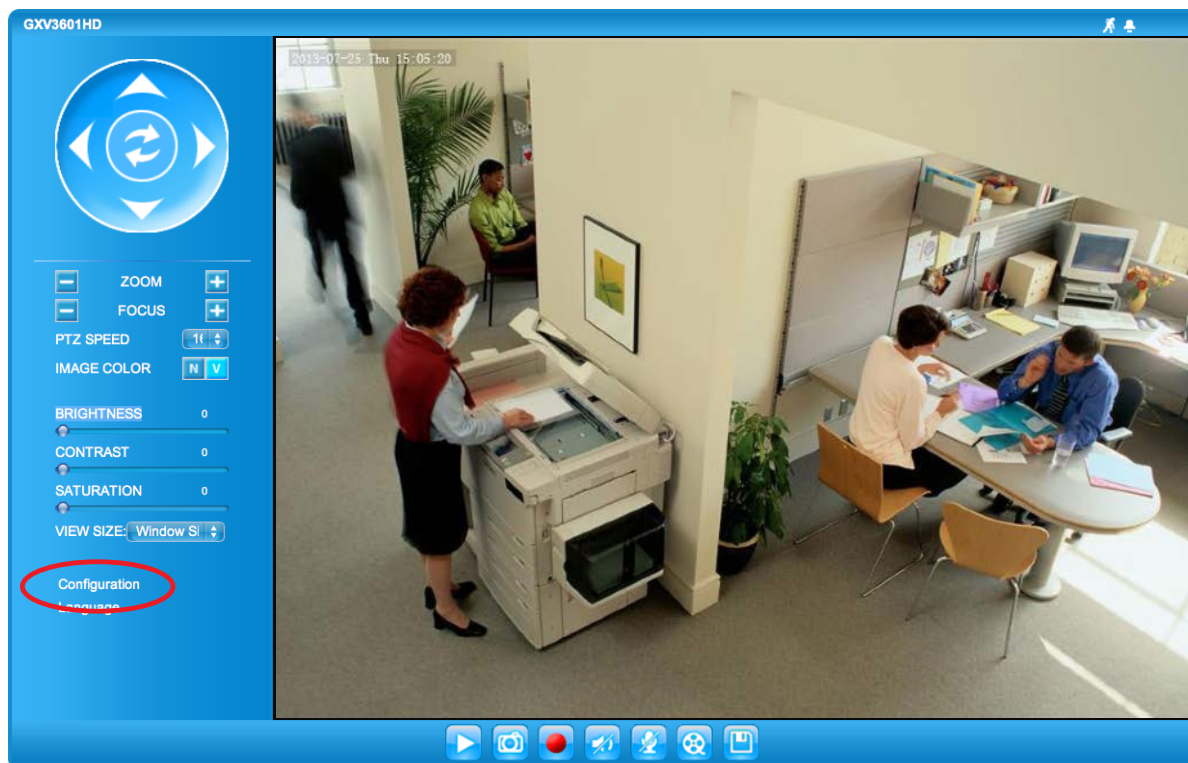

The server http://10.10.0.1 requires a username and password.

User Name:


Password:

Cancel


Log In



3. Under Advanced Settings on the left, click “Maintenance”.

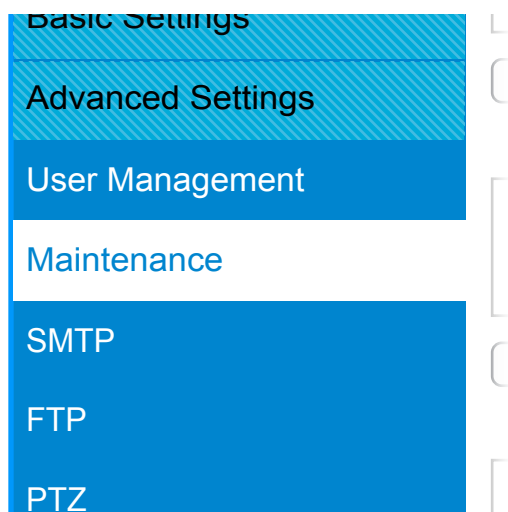

4. Then under Restore the device, press the “Restore” button.

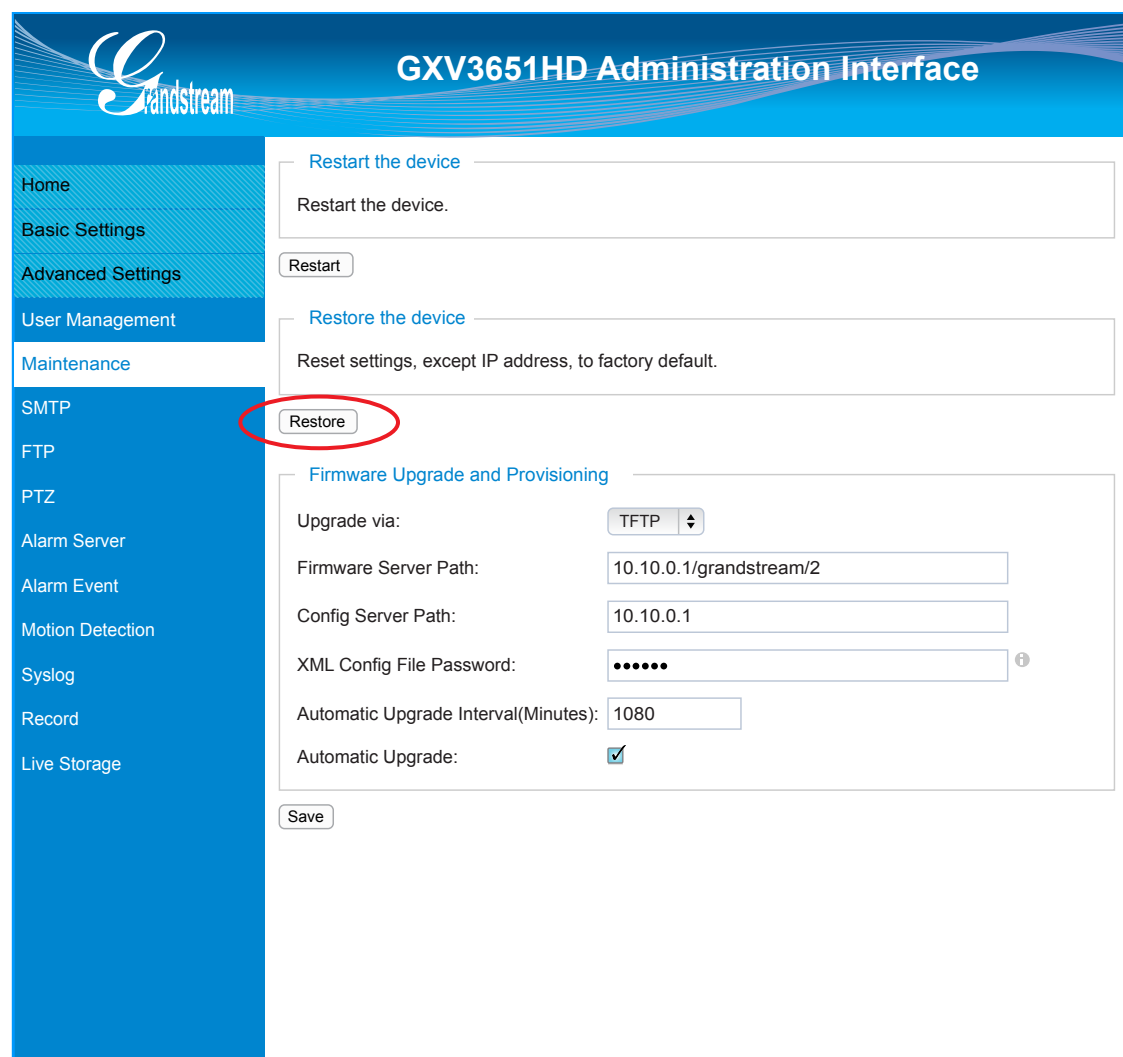

5. The device is now reset to factory default.



Schmooze®
Schmooze Com Inc.

(920) 886-8130

<http://schmoozecom.com>