

# Cortelco C56P

## Admin Guide



**Schmooze®**  
Schmooze Com Inc.



## Chapters


- ▶ How to Find the IP Address
- ▶ How to Find the MAC Address
- ▶ How to Set the Configuration Server
- ▶ How to Restore Factory Default




## How to Find the IP Address

### Quick Steps


1. Press the Menu soft key.

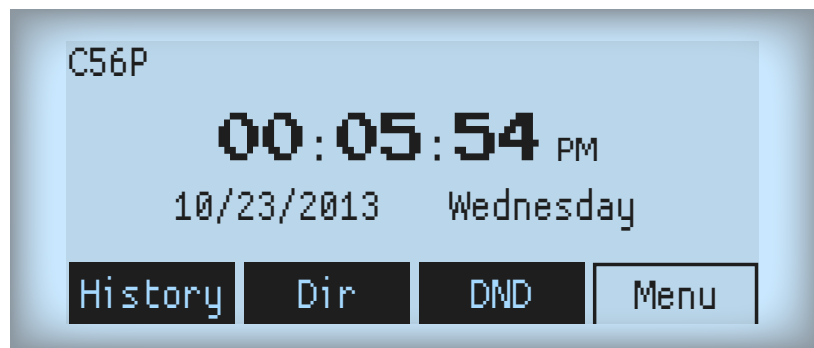

2. The first option will be Status, press Enter.

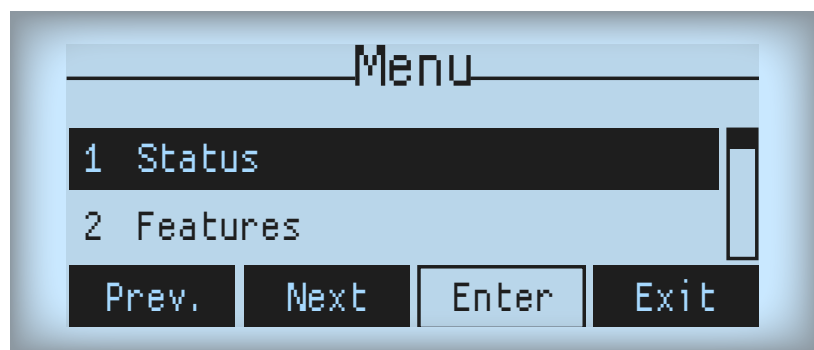

3. The IP Address will display as number 2.

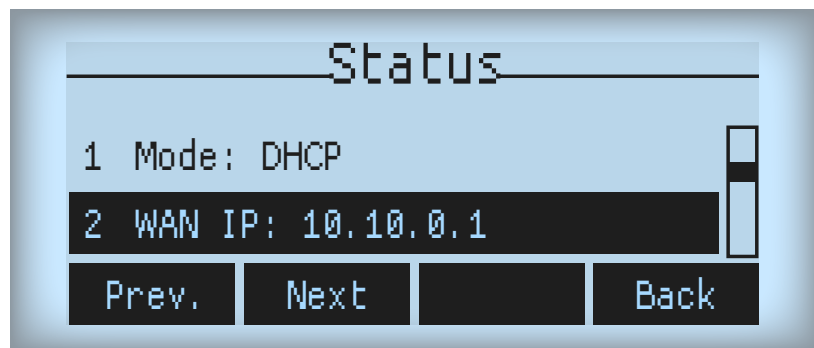



## How to Find the MAC Address

### Quick Steps

1. Enter the IP Address into a local web browser address field.
2. When prompted, enter “admin” as the user name and “admin” as the password.

User:

Password:

Language:  ▼

3. On the main System Status page you can see the MAC Address.

The screenshot shows the 'STATUS' tab selected. The left sidebar has a menu with 'BASIC' selected. The main content area is divided into two sections: 'Network' and 'Accounts'.

Network	
WAN	LAN
Connection Mode	DHCP
MAC Address	00:a8:59:c8:27:e8
IP Address	10.10.0.1
IP Gateway	10.10.0.2
	DHCP Service
	Bridge Mode

Accounts	
SIP Line 1	5703@10.10.0.1:5070
SIP Line 2	@:0
IAX2	@:4565



## How to Set the Configuration Server

### Quick Steps


1. Enter the IP Address into a local web browser address field.
2. When prompted, enter “admin” as the user name and “admin” as the password.

User:

Password:

Language:  ▼

3. Click on “Maintenance” from the options on the left.

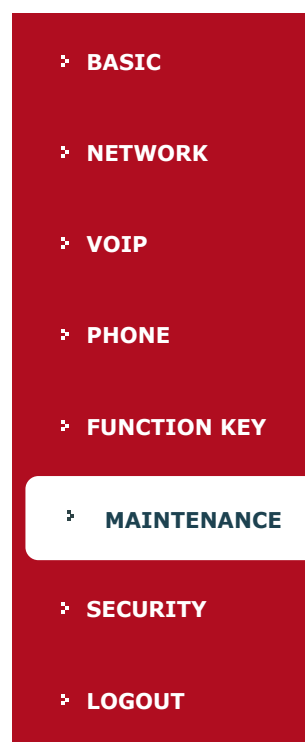

4. Select the “Update” tab at the top of the page.





5. In the “Server Address” field under TFTP/FTP Update, paste the IP Address.

**Web Update**

Select File:   (\*.z,\*.txt,\*.xml,\*.au,\*.vcf,\*.csv,\*.wav)

**TFTP/FTP Update**

Server Address:

User:

Password:

File Name:

Type:

Protocol:

**Update Logo File**

Select File:

**Delete Logo File**


Select File:

**Logo File**

## How to Restore Factory Default

### Quick Steps

1. Press the Menu soft key.

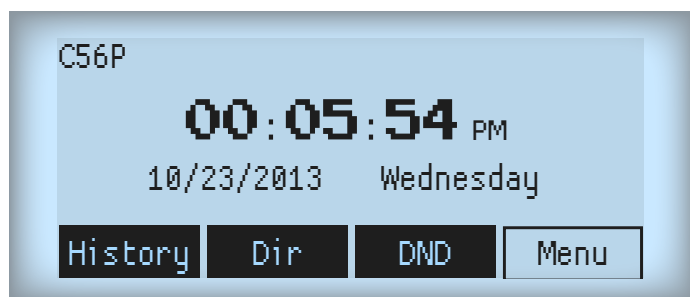


2. Scroll to option 3, Settings, and press Enter.






3. Then select option 2, Advanced Options, and press Enter.

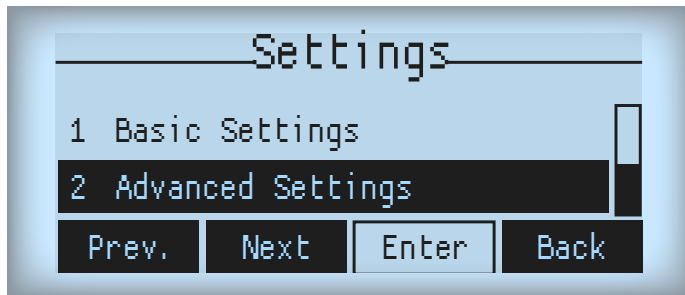

4. Now enter the password, which is 123 by default and press Enter.

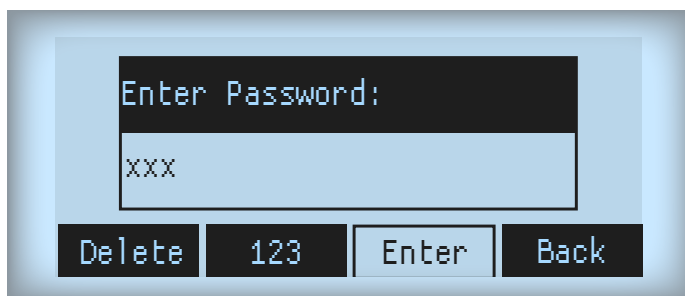

5. Scroll to option 5, Factory Reset, press Enter and select Yes.





**Schmooze<sup>®</sup>**  
*Schmooze Com Inc.*

**(920) 886-8130**

<http://schmoozecom.com>