

Linksys IP Phones

901, 92X, 94X and 962
Admin Guide



Schmooze[®]

Schmooze Com Inc.




How To Find IP Address

Quick Steps


1. Select the menu button.



2. Scroll down to Network and press the Select softkey.

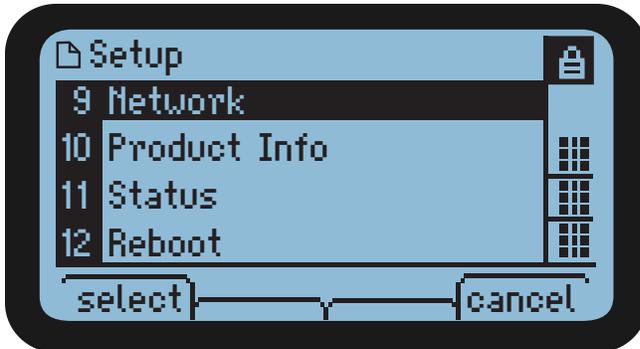

3. Scroll down and you will see the IP Address.

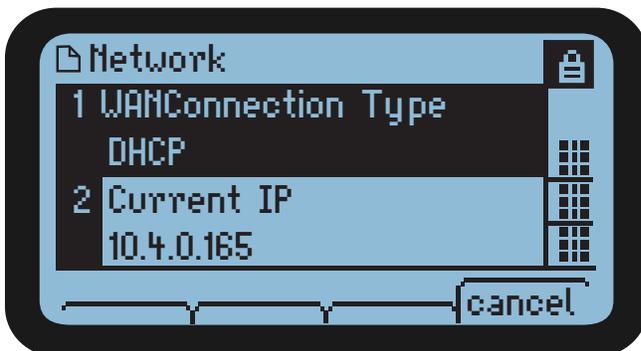


How To Find MAC Address

Quick Steps

1. Select the menu button.



2. Scroll down to Product Info and press the Select softkey.

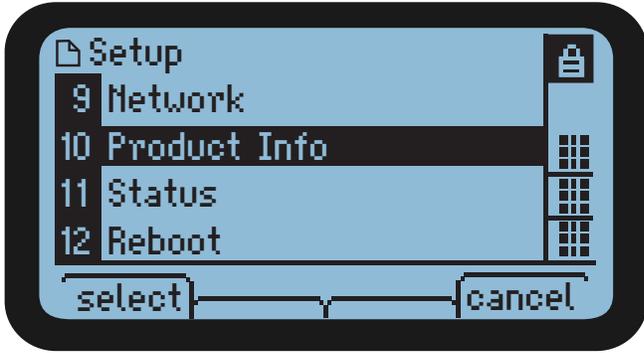

3. Scroll down and you will see the MAC address.



How To Set the Configuration Server

Quick Steps

1. Find the IP Address of the device and open a web browser to the IP address of the phone.
2. Login with the phone user password.

The server 10.4.0.168:80 requires a username and password. The server says: spa admin.

User Name:

Password:

3. Click on the Admin option at the top and login with the admin user



LINKSYS[®]
A Division of Cisco Systems, Inc.

Linksys Telephone Configuration

Info | System | Phone | User | [User Login](#) | [Admin](#) | [advanced](#)
[Personal Directory](#) | [Call History](#)

System Information

4. Click on the Advanced option at the top

LINKSYS[®]
A Division of Cisco Systems, Inc.

Linksys Telephone Configuration

Info | System | SIP | [User Login](#) | [basic](#) | [advanced](#)
[Personal Directory](#) | [Call History](#)

System Information

5. Click on Provisioning tab at the top

LINKSYS[®]
A Division of Cisco Systems, Inc.

Linksys Telephone Configuration

Info | System | SIP | **Provisioning** | Regional | Phone | Ext 1 | Ext 2 | Ext 3 | Ext 4 | User | [User Login](#) | [basic](#) | [advanced](#)
[Personal Directory](#) | [Call History](#)

Configuration Profile

Provision Enable:	<input type="text" value="yes"/>	Resync On Reset:	<input type="text" value="yes"/>
Resync Random Delay:	<input type="text" value="2"/>	Resync Periodic:	<input type="text" value="86400"/>
Resync Error Retry Delay:	<input type="text" value="3600"/>	Forced Resync Delay:	<input type="text" value="14400"/>
Resync from SIP:	<input type="text" value="yes"/>	Resync After Upgrade Attempt:	<input type="text" value="yes"/>
Resync Trigger 1:	<input type="text"/>		
Resync Trigger 2:	<input type="text"/>		
Resync Fails On FNF:	<input type="text"/>		
Profile Rule:	<input type="text" value="tftp://10.10.0.1.spa\$MA.xml"/>		

6. Define the Profile Rule to your PBX. Generally this would be tftp://IPADDRESS/spa\$MA.xml such as tftp://10.10.0.1/spa\$MA.xml in our example and press the Save button at the bottom.




How To Factory Default

Quick Steps

1. Select the menu button.



2. Scroll down to Factory Reset and press the Select softkey.

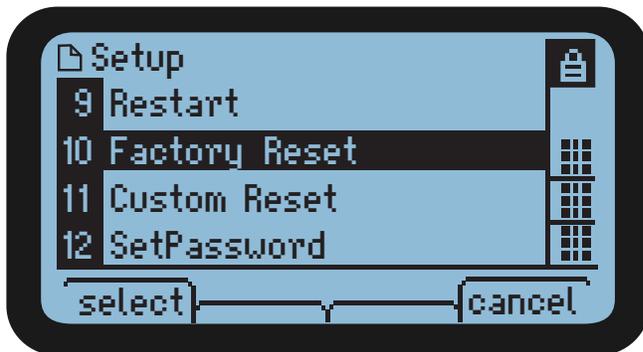



Schmooze[®]
Schmooze Com Inc.

(920) 886-8130

<http://schmoozecom.com>