

Grandstream GXP

GXP 110X, 1200, 140X, 1450, 2000, 2100, 2110, 2120 & 28X
Admin Guide



Schmooze[®]

Schmooze Com Inc.



Chapters

- ▶ Find the IP Address and MAC Address
- ▶ Set the Configuration Server
- ▶ Reset to Factory Defaults

Find the IP Address and MAC Address

Quick Steps

1. Select the “Menu” button.
2. Select Status.



3. Scroll down until you see the IP address or Mac address.





Set the Configuration Server

Quick Steps

1. Find the IP address of the phone and open a web browser to the IP address.
2. Login with the phone admin password. Default factory password is admin

The screenshot shows the login page of the Grandstream Device Configuration interface. It features a title bar with the text "Grandstream Device Configuration". Below the title bar is a yellow section with the label "Password" and an empty text input field. Underneath the input field is a "Login" button. At the bottom of the page, there is a footer that reads "All Rights Reserved Grandstream Networks, Inc. 2006-2011".

3. Click on the "Advanced Settings" option at the top.

The screenshot shows the "Advanced Settings" page of the Grandstream Device Configuration interface. The title bar reads "Grandstream Device Configuration". Below the title bar are several tabs: "STATUS", "BASIC SETTINGS", "ADVANCED SETTINGS" (which is circled in red), "PROFILE 1", "PROFILE 2", and "FXS PORTS". The main content area displays various system information:

- MAC Address:** WAN-- 00:00:00:00:00:00 LAN-- 00:00:00:00:00:00 (Device MAC)
- WAN IP Address:** 10.10.0.241
- Product Model:** HT-502 V1.2A
- Software Version:** Program -- 1.0.7.6 Bootloader -- 1.0.0.15 Core -- 1.0.7.1 Base -- 1.0.7.6 CPE -- 1.0.1.19
- System Up Time:** 09:06:40 up 7 days
- PPPoE Link Up:** Disabled
- NAT:**
- Port Status:**

Port	Hook	Registration	DND	Forward	Busy Forward	Delayed Forward
FXS 1	On Hook	Registered	No			
FXS 2	On Hook	Registered	No			

At the bottom of the page, there is a footer that reads "All Rights Reserved Grandstream Networks, Inc. 2006-2011".

4. Define the Config server path to your PBX. Generally this would be the IP address such as 10.10.0.1, used in our example. Press the "Save" button at the bottom.

The screenshot shows the "Advanced Settings" page of the Grandstream Device Configuration interface, focusing on the configuration of the STUN server and the Config Server Path. The title bar reads "Grandstream Device Configuration". Below the title bar are several tabs: "STATUS", "BASIC SETTINGS", "ADVANCED SETTINGS", "PROFILE 1", "PROFILE 2", and "FXS PORTS". The main content area displays various configuration options:

- Admin Password:** [] (purposely not displayed for security protection)
- Layer 3 QoS:** [12] (Diff-Serv or Precedence value)
- Layer 2 QoS:** 802.1Q/VLAN Tag [0] 802.1p priority value [0] (0-7)
802.1p priority value (NATed traffic) [0] (0-7)
- STUN server is :** [] (URI or IP:port)
- Keep-alive Interval:** [20] (in seconds, default 20 seconds)
- Use STUN to detect network connectivity:** No Yes, total STUN response misses [3] to restart DHCP (minimum=3)
- Firmware Upgrade and Provisioning:** Upgrade Via TFTP HTTP HTTPS
- Firmware Server Path:** [10.10.0.1/grandstream/2]
- Config Server Path:** [10.10.0.1/]

A red arrow points to the "Config Server Path" input field.


At the bottom of the page, there is a footer that reads "All Rights Reserved Grandstream Networks, Inc. 2006-2011".



Reset to Factory Defaults

Quick Steps

1. Press the Menu button.
2. Scroll down to Config and select it by pressing the Menu button

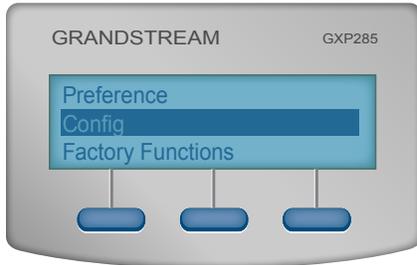

3. Select down to Factory Reset and select it by pressing the Menu button.



4. You will now need to enter the MAC address of the phone. It can be found on a label on the bottom of the phone.



5. Press OK, the phone will now reboot and perform a factory reset.



Schmooze[®]
Schmooze Com Inc.

(920) 886-8130

<http://schmoozecom.com>